




**Tubo flessibile
estensibile-alluminio**

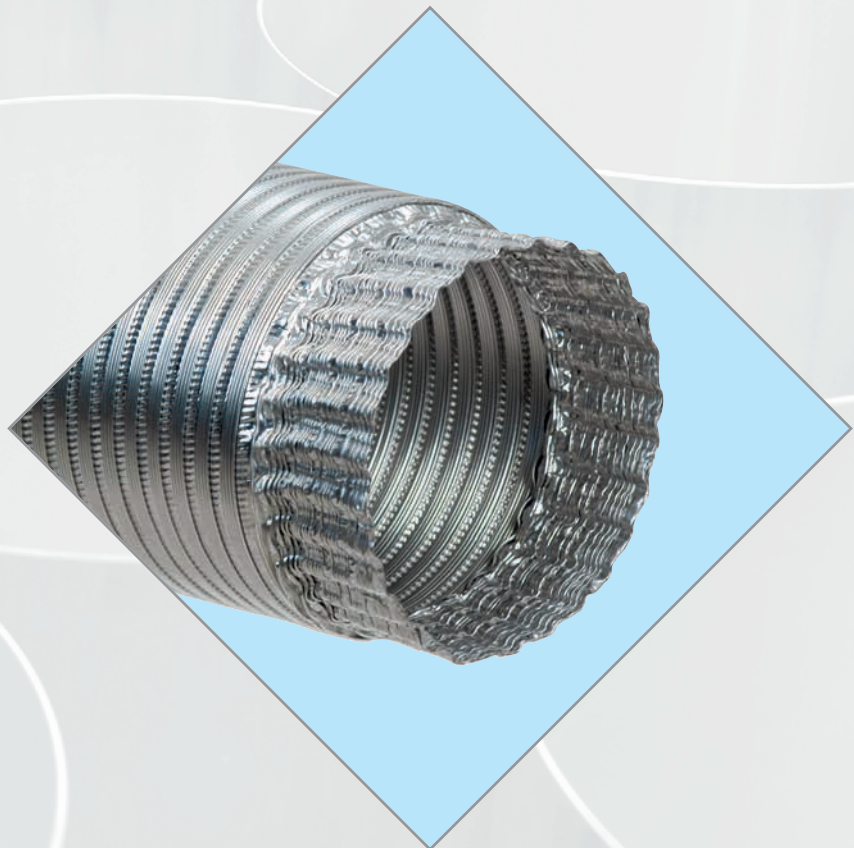

CARATTERISTICHE GENERALI:

Tubo flessibile, estensibile impiegato per impianti di aspirazione e ventilazione ed è di grande praticità e facilità d'installazione. Fornito con imbocco ad una estremità che permette la giunzione di più tubi tra di loro. A richiesta fornito anche senza imbocco.

N.B. 3 METRI ALL'ORIGINE, COMPRESSO A 80 CM

SPESSORE MATERIALE:

- 0,12 mm

QUALITÀ ALLUMINIO:

- alluminio puro al 99,9%

CAMPI DI APPLICAZIONE:

- condotte di ventilazione d'aria,
- filtrazione polveri,
- applicazioni estetiche per impianti di condizionamento e ventilazione

TEMPERATURA DI ESERCIZIO:

- standard in continuo fino a 280° C in alluminio naturale,
- standard in continuo fino a 230° C alluminio bianco o marrone

CARATTERISTICHE TECNICHE:

- flessibile ed estensibile,
- rapidità della posa in opera,
- nessuna manutenzione,
- massima economia,
- perfetta tenuta

FEATURES:

This flexible and extendable flue pipe is suitable for air suction and ventilation systems: it is practical and easy to install. One end is recessed so to permit the connection of more ducts without using special joints. Upon request it is manufactured without recess.

N.B. ORIGINALLY 3-METRE LENGTHS COMPRESSED INTO 80 CM

MATERIAL THICKNESS:

- 0,12 mm

ALUMINIUM QUALITY:

- 99.9% pure aluminium

APPLICATIONS:

- air ventilation systems,
- dust removal systems,
- aesthetic applications for ventilation and air conditioning systems

WORKING TEMPERATURE:

- continuous up to 280° C in natural aluminium colour,
- continuous up to 230° C aluminium white or brown

SPECIFICATIONS:

- flexible and extendable,
- fast assembly,
- no maintenance required,
- inexpensive,
- excellent sealing



ALLUMINIO COMPRESSO SENZA IMBOCCO
COMPRESSED ALUMINIUM FLUE PIPE WITHOUT RECESS



ALLUMINIO COMPRESSO CON IMBOCCO
COMPRESSED ALUMINIUM FLUE PIPE WITH END RECESS



NATURALE / NATURAL

N.B. 3 METRI ALL'ORIGINE, COMPRESSO A 80 CM
N.B. ORIGINALLY 3-METRE LENGTHS COMPRESSED INTO 80 CM

Articolo Code	Ø mm	Imballo pz Packing pce
TANE060	60	6
TANE080	80	6
TANE090	90	6
TANE100	100	6
TANE110	110	6
TANE120	120	6
TANE125	125	6
TANE130	130	6
TANE140	140	6
TANE150	150	6
TANE160	160	6
TANE180	180	6
TANE200	200	6
TANE220	220	6
TANE225	225	6
TANE250	250	6
TANE300	300	4



TABE = BIANCO / WHITE
TAME = MARRONE / BROWN
N.B. 3 METRI ALL'ORIGINE, COMPRESSO A 80 CM
N.B. ORIGINALLY 3-METRE LENGTHS COMPRESSED INTO 80 CM

Articolo bianco Code white	Articolo marrone Code brown	Ø mm	Imballo pz Packing pce
TABE060	-	60	6
TABE080	TAME080	80	6
TABE090	TAME090	90	6
TABE100	TAME100	100	6
TABE110	TAME110	110	6
TABE120	TAME120	120	6
TABE125	TAME125	125	6
TABE130	TAME130	130	6
TABE140	TAME140	140	6
TABE150	TAME150	150	6
TABE160	TAME160	160	6
TABE180	TAME180	180	6
TABE200	TAME200	200	6
TABE220	TAME220	220	6
TABE225	TAME225	225	6
TABE250	TAME250	250	6
TABE300	TAME300	300	4





Permette il collegamento tra il tubo estensibile di alluminio e i vari condotti.

To connect the extendable aluminium flue pipe to the various other sections.



Giunto lamiera zincata
Galvanised sheet metal connection

Articolo Code	Ø mm	Imballo pz Packing pce
GLZ080	80	1
GLZ090	90	1
GLZ100	100	1
GLZ110	110	1
GLZ120	120	1
GLZ125	125	1
GLZ130	130	1
GLZ140	140	1
GLZ150	150	1
GLZ160	160	1
GLZ180	180	1
GLZ200	200	1
GLZ220	220	1
GLZ225	225	1
GLZ250	250	1
GLZ300	300	1



Permette il collegamento tra il tubo estensibile di alluminio e il giunto lamiera zincata.

To connect the extendable aluminium flue pipe to the galvanised sheet steel connection.



Fascette regolabili
Adjustable ring clamps

Articolo Code	Ø mm	Imballo pz Packing pce
FTT60-135	60-135	100
FTT60-170	60-170	100
FTT60-215	60-215	100
FTT60-325	60-325	100
FTT60-525	60-525	100



Permette di mantenere fissato il tubo di alluminio alle pareti sia verticali che orizzontali.

To anchor the aluminium flue pipes to walls, both vertically and horizontally.



Collare telescopico
Extendable ring clamps

Articolo Code	Colore Color	Ø mm	Imballo pz Packing pce
CTI080-140	Inox	80-140	100
CTB080-140	Bianco/White	80-140	100
CTM080-140	Marrone/Brown	80-140	100
CTI140-200	Inox	140-200	50
CTB140-200	Bianco/White	140-200	50
CTM140-200	Marrone/Brown	140-200	50